

THE RIGHT SPRING FOR YOUR APPLICATION



Undermount
up to 42'



Twin 280°
all dump bodies



PowerPack
up to 28'





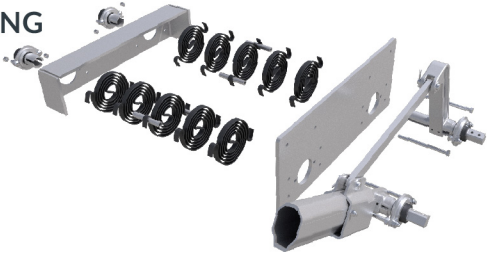


10-Spring
45' to 53'



5-Spring
up to 38'



SPRING MODEL	OVERVIEW	APPLICATION	FRONT ASSEMBLY	TARP FABRIC
<p>TWIN 280° (565)</p> 	<p>6-SPRING</p> <p><i>high mount provides unobstructed view when loading an asphalt paver</i></p>	<p>DUMP BODIES</p>	<p><i>adjustable wind deflector or preassembled tarp housing</i></p>	<p>MESH MONSTER MESH SOLID ASPHALT</p>
<p>POWERPACK (575 / 475 / 875)</p> 	<p>3-SPRING</p> <p><i>low profile is fully enclosed, protecting springs from all elements</i></p>	<p>DUMP BODIES + TRAILERS <i>up to 28'</i></p> <p>REFUSE ROC <i>roll-off container up to 25'</i></p>	<p><i>adjustable wind deflector or preassembled tarp housing</i></p>	<p>MESH MONSTER MESH SOLID ASPHALT</p>
<p>UNDERMOUNT (500 / 550 / 400 / 450 / 850)</p> 	<p>COILED SPRING WITH THROUGH SHAFT</p> <p><i>industry's most durable and longest lasting</i></p>	<p>DUMP BODIES + TRAILERS <i>up to 42'</i></p> <p>REFUSE ROLL-OFF CONTAINER <i>up to 25'</i></p>	<p><i>adjustable wind deflector or preassembled tarp housing</i></p>	<p>MESH MONSTER MESH SOLID ASPHALT (UP TO 28')</p>
<p>5-SPRING (585 / 485)</p> 	<p>5-SPRING</p> <p><i>flange mounts under bottom rail and provides constant tension</i></p>	<p>TRAILERS <i>up to 38'</i></p>	<p><i>adjustable wind deflector or preassembled tarp housing</i></p>	<p>MESH MONSTER MESH SOLID ASPHALT (UP TO 28')</p>
<p>10-SPRING (595)</p> 	<p>10-SPRING WITH DUAL SHAFTS</p> <p><i>ideal for scrap and demolition hauling as powerful spring assembly mounts under trailer</i></p>	<p>TRAILERS <i>between 45' and 53'</i></p>	<p><i>preassembled tarp housing (AVAILABLE WITH REAR OR TOP OPENING)</i></p>	<p>MESH MONSTER MESH</p>